


ELECTROMAGNETIC LOCK SERIES & BRACKETS



ELOCK-120

Single Door Mini Magnetic Lock


Size: 80L×41W×25H (mm)
Holding Force: 60kg (120Lbs)
Current Draw: 12V/100mA
Suitable for: Cabinet
Mini Door
Feature: Fail safe
Weight: 0.5KG



ELOCK-300

Single Door Magnetic Lock


Size: 170L×42W×21H (mm)
Holding Force: 140kg (300Lbs)
Current Draw: 300mA at 12VDC
150mA at 24VDC
Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door
Feature: Fail safe
Weight: 1.2KG



ELOCK-300x2

Double Door Magnetic Lock


Size: 340L×42W×21H (mm)
Holding Force: 140kg×2 (300Lbs×2)
Current Draw: 300mA at 12VDC
150mA at 24VDC
Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door
Feature: Fail safe
Weight: 2.4KG



ELOCK-600

Single Door Magnetic Lock with Signal & LED


Size: 250L×47W×25H (mm)
Holding Force: 280kg (600Lbs)
Current Draw: 460mA at 12VDC
230mA at 24VDC
Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door
Feature: Fail safe
Weight: 2KG



ELOCK-600x2

Double Door Magnetic Lock with Signal & LED

Size: 500L×47W×25H (mm)
Holding Force: 280kg×2 (600Lbs×2)
Current Draw: 460mA at 12VDC
230mA at 24VDC
Suitable for: Wooden Door
Glass Door
Metal Door
Fireproof Door
Feature: Fail safe
Weight: 4KG




ELECTROMAGNETIC LOCK SERIES & BRACKETS




Single Door Magnetic Lock with Waterproof

Size: 250L×42W×25H (mm)
 Holding Force: 280kg (600Lbs)
 Current Draw: 480mA at 12VDC
 240mA at 24VDC
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail safe
 Weight: 2KG




Single Door Magnetic Lock with Signal & LED

Size: 265L×71W×40H (mm)
 Holding Force: 600kg (1200Lbs)
 Current Draw: 600mA at 12VDC
 300mA at 24VDC
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail safe
 Weight: 4.5KG




Single Door Magnetic Lock with Waterproof

Size: 265L×66W×40H (mm)
 Holding Force: 600kg (1200Lbs)
 Current Draw: 600mA at 12VDC
 300mA at 24VDC
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail safe
 Weight: 4.5KG




Double Door Magnetic Lock with Signal & LED

Size: 530L×71W×40H (mm)
 Holding Force: 600kg×2 (1200Lbs×2)
 Current Draw: 600mA at 12VDC
 300mA at 24VDC
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail safe
 Weight: 9.2KG




U bracket for Frameless Glass Door(280kg/600Lbs)

Size: 180L×41W×28H (mm)
 Suitable for: Glass Door
 Glass Thickness: 8-15mm
 Open Mode: 90 degree door
 Weight: 0.3KG




ELECTROMAGNETIC LOCK SERIES & BRACKETS

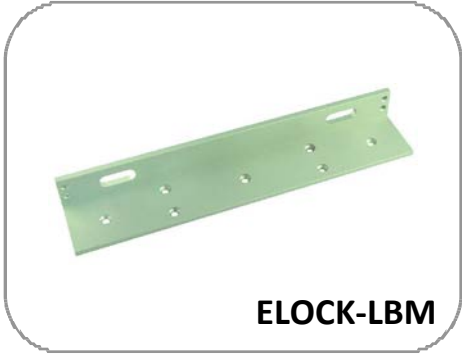

ELOCK-LBM

L bracket for Magnetic Lock (280kg/600lbs)


Size: 250L×47W×28H (mm)
Suitable for: Inward Door
Wooden Door
Metal Door
Narrow Door
Open Mode: 90 degree door
Weight: 0.25KG



ELOCK-ZLM

ZL bracket for Magnetic Lock (280kg/600lbs)

Size: Z:180L×50W×50H (mm)
L:250L×47W×28H (mm)
Suitable for: Inward Door
Wooden Door
Metal Door
Narrow Door
Open Mode: 90 degree door
Weight: 0.7KG




ELECTRIC STRIKE & BOLT LOCK SERIES & BRACKETS



ELOCK-S210M

Electric strike


Size: 150L×38W×33H (mm)
 Voltage: 12V DC
 Current: Start 250mA
 Standby 200mA
 Suitable for: Wooden Door
 metal Door
 Feature: Fail secure
 Weight: 0.4KG



ELOCK-S210M

Electric strike


Size: 150L×38W×33H (mm)
 Voltage: 12V DC
 Current: Start 250mA
 Standby 200mA
 Suitable for: Wooden Door
 metal Door
 Feature: Fail safe
 Weight: 0.4KG



ELOCK-STL100

Electric Lock for Small Cabinet


Lock Size: 55L×43W×28H (mm)
 Voltage: 12V DC
 Current: 900mA
 Suitable for: Small cabinet
 Feature: Fail Secure
 Weight: 0.2KG



ELOCK-STL200

Shear Lock with Signal


Lock Size: 266L×30W×34H (mm)
 Armature plate: 266L×30W×34H(mm)
 Shear force: 2600lbs (1200kg)
 Voltage: DC 12V---24V
 Current: Start 1000-1800mA
 Standby 150-350mA
 Feature: Fail safe
 Weight: 1.7KG



ELOCK-B4MK

Fail Secure Electric Drop Bolt Locks with Cylinder

Lock Size: 260L×30W×65H (mm)
 Voltage: DC 12V
 Current: Start 900mA
 Time Delay: 0,3,6,9sec
 Signal Output: NO NC COM
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail secure, w/ Key
 Weight: 1.2KG




ELECTRIC STRIKE & BOLT LOCK SERIES & BRACKETS



ELOCK-B100

Fail Safe Electric Bolt W/ Signal& Time Delay


Size: 205L×35W×42H (mm)
 Voltage: 12V DC
 Current: Start 900mA, Standby 100mA
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail Safe
 Signal Output: NC COM
 Time Delay: 0,3,6,9sec
 Weight: 0.7KG



ELOCK-B4SE

Fail Secure Electric Bolt W/ Signal& Time Delay


Size: 205L×35W×42H (mm)
 Voltage: 12V DC
 Current: Start 900mA, Standby 100mA
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail Secure, Telecontrol
 Signal Output: NC COM
 Time Delay: 0,3,6,9sec
 Weight: 0.8KG



ELOCK-B4MINI

Fail Safe Electric Bolt (Mini Type) W/ Signal& Time Delay


Size: 190L×25W×35H (mm)
 Voltage: 12V DC
 Current: Start 900mA, Standby 100mA
 Suitable for: Wooden Door
 Glass Door
 Metal Door
 Fireproof Door
 Feature: Fail Safe / Fail Secure
 Signal Output: Door states Output, NC COM
 Lock states Output NC NO COM
 Time Delay: 0,3,6,9sec
 Weight: 0.8KG



ELOCK-LBB

Stainless Steel Bracket for Frameless Glass Door


Size: 95L×48W×38H (mm)
 Used with: ELOCK-B100
 ELOCK-B4SE
 ELOCK-B4MINI
 ELOCK-B4MK
 Glass Thickness: 8-15mm
 Suitable for: Glass Door
 Opening Mode: 180 degree swing door
 Weight: 0.3KG



ELOCK-UBB

Stainless Steel Bracket for Fully Frameless Glass Door

Size: 210L×58W×46H (mm)
 Used with: ELOCK-B100
 ELOCK-B4SE
 Glass Thickness: 8-15mm
 Suitable for: Glass Door
 Opening Mode: 180 degree swing door
 Weight: 0.8KG (upper)
 0.9KG (downr)




SWITCH & PUSH BUTTONS SERIES



ELOCK-PB1A

Door Release Button (Stainless steel)


Size: 90L×29W×24H (mm)
 Signal Output: NC COM
 Suitable for: Hollow Frame
 Mechanical life: 500,000 times
 Weight:0.03KG



ELOCK-PB2A

Door Release Button (Stainless steel)


Size: 90L×90W×30H (mm)
 Signal Output: NC COM
 Suitable for: Hollow Frame
 Mechanical life: 500,000 times
 Weight:0.06KG



ELOCK-PB5A

Door Release Button (Plastic)



Size: 86L×86W×38H (mm)
 Signal Output: NO COM
 Feature: Fail Safe
 Mechanical life: 500,000 times
 Weight: 0.06KG



ELOCK-PTE300

Infrared Exit


Size: 115L×70W×29H (mm)
 Voltage: 12V DC
 Signal Output: NO COM
 Feature: Fail Safe
 Suitable for: Entrance
 Exit
 Automation Control System
 Mechanical life: 500,000 times
 Weight: 0.1KG

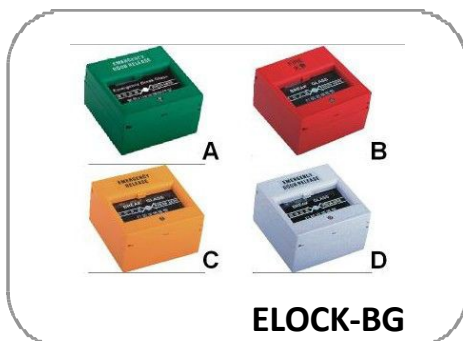

ELOCK-BG

Break Glass Call Point

Size: 86L×86W×50H (mm)
 Material: Fireproof
 Suitable for: Entrance
 Exit
 Escape Vent
 Output Contact: NC COM
 Color: A:Green B:Orange
 C:Red D:White
 Weight:0.15KG



SWITCH & PUSH BUTTONS SERIES



Door Release Key Switch (Stainless steel)

Size: 90L×90W×30H (mm)
Signal Output: NC COM
Feature: Fail Safe
Mechanical life: 500,000 times
Weight:0.1KG

